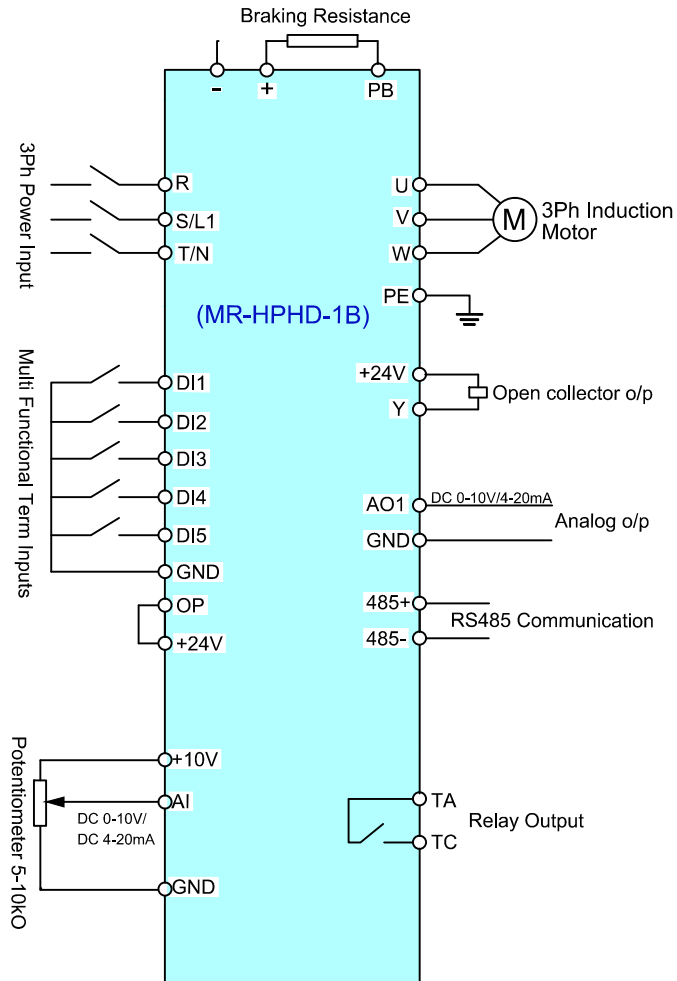




MAC-REFU VFD (MR-EcoHD-1B) : QUICK START AT A GLANCE

SCHEMATIC POWER & CONTROL DRAWING

2-WIRE CONTROL*
(BY RELAY)3-WIRE CONTROL**
(BY PUSHBUTTON)

COMMON PARAMETERS

- 00.01 - 0 (V/F Mode), 1(V/F Adv. Mode), 2(Vect. Mode)
- 00.02 - 0 (Keypad), 1 (Term)
- 00.03 - 0 (Keypad Pot), 3 (Ext. Pot)
- 00.10 - 7.5 SEC (Acc Time)
- 00.11 - 7.5 SEC (Dcc Time)
- 00.14 - 3% (Torque Boost)
- 01.04 - 0 (Ramp to Stop), 1(Coast to Stop)

2-WIRE CONTROL PARA*

- 02.13 - 3 -Forward
- 02.14 - 4 -Reverse
- 02.18 - 0 -Two Wire

3-WIRE CONTROL PARA**

- 02.13 - 3 -Forward
- 02.14 - 4 -Reverse
- 02.15 - 5 -Three Wire
- 02.18 - 2 -Three Wire

02.20 - 5 (Fault O/P Relay)*

MOTOR PARAMETERS:

- 04.00 - Rated Voltage
- 04.01 - Rated Current
- 04.02 - Rated RPM
- 04.03 - Rated Frequency


DRIVE AUTOTUNE

- 04.16 - 1 (Static Auto tune)

DRIVE DEFAULT SETTING

- 08.05 - 1 (Restore Factory Default Value)

MULTI FUNCTIONAL CONTROL I/O'S TERM. STRIP

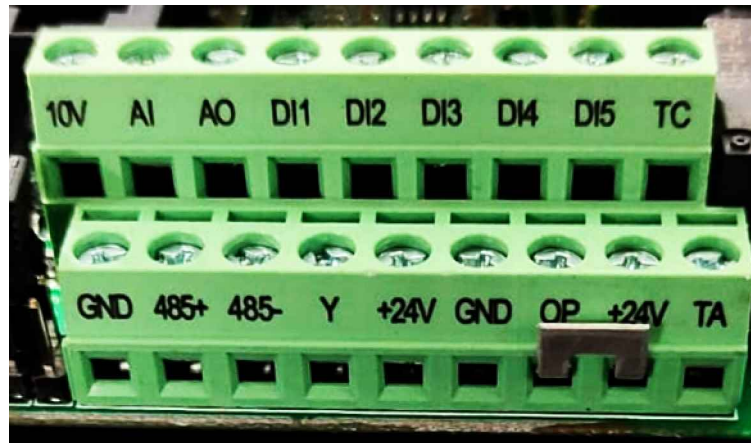

MACTROL-REFU PRIVATE LIMITED
GHAZIABAD (U.P.)

CLIENT: GENERAL PURPOSE

TITLE: MAC-REFU VFD (MR-EcoHD-1B): QUICK START AT A GLANCE

SHEET	1/1	SIZE	A4	DRN.	PSK				
DRG No.:	MAC/P&D/24-25/008	APPD.	HSB						
DATE	REV.	0							
16/08/24									